


MARINE LEADER

6 – 99 kW

ISUZU GENERATOR SETS



KEEL COOL, DRY EXHAUST 6 kW – 99 kW CONTINUOUS DUTY

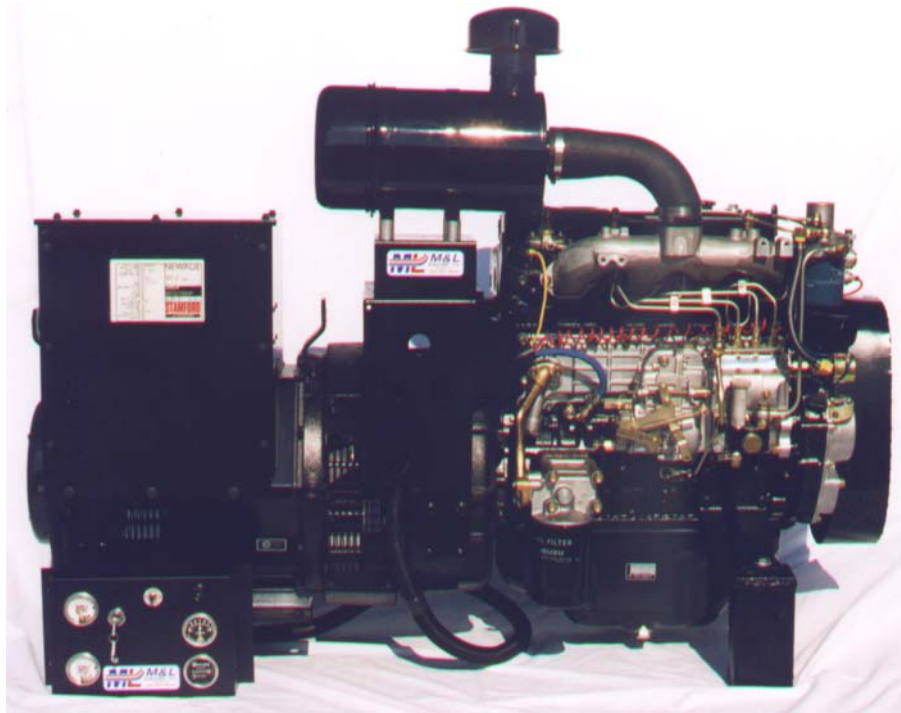

STANDARD EQUIPMENT


ISUZU 1800 R.P.M. DIESEL ENGINE, BRUSHLESS A.C. GENERATOR, KEY OPERATED STARTING, MANUAL FUEL SHUTOFF, 12VDC STARTER, RUBBER VIBRATION ISOLATORS, LUBE OIL & FUEL FILTERS, ENGINE INSTRUMENT PANEL, 5' WIRE HARNESS, SAFETY SHUTDOWN SYSTEM, AIR CLEANER & EXHAUST FLANGE.

OPTIONAL ACCESSORIES

- A.C. METER PANEL WITH AMMETER, VOLTMETER, FREQUENCY METER, & PHASE SELECTOR SWITCH
- HEAT EXCHANGE COOLING
- ELECTRIC FUEL PUMP
- EXTENDED WIRE HARNESS FOR REMOTE OPERATION
- RACOR WATER/FUEL SEPARATOR
- LEAD ACID CRANKING BATTERY



Overall Dimensions

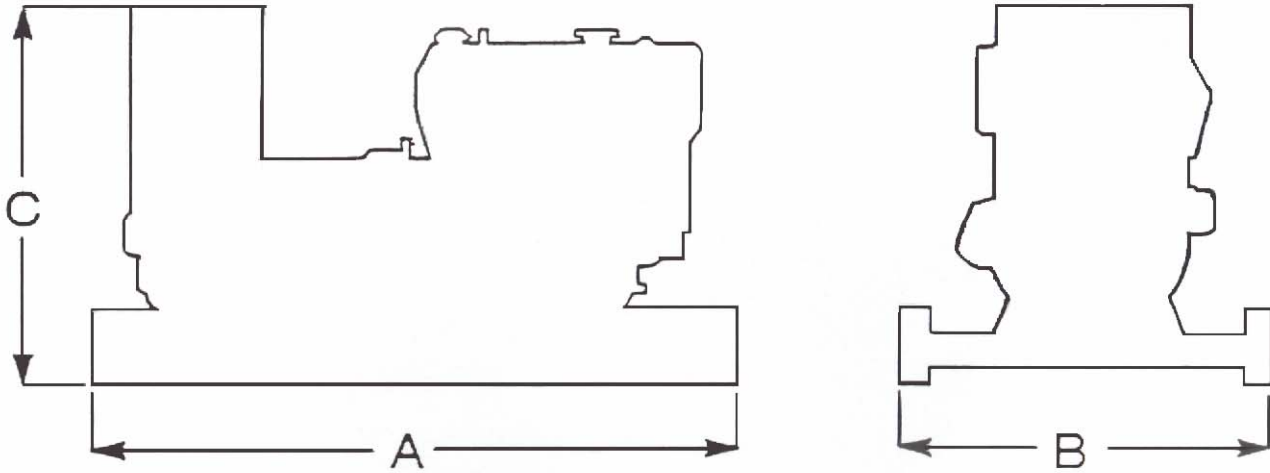

MODEL	ENGINE 60 HZ.	RATED OUTPUT KW @ 0.8 P F 1800 RPM	APPROX. FUEL CONSUMPTION GAL/HR-MAX LOAD	APPROX. DIMENSIONS INCHES			APPROX. WEIGHT LBS
				A	B	C	
ML6INKD	3CA1	6	0.8	34	17	21	408
ML8.2INKD	3CB1	8.2	0.9	36	17.5	22	459
ML11INKD	3CE1	11	1.4	37	17.5	25	489
ML13.5INKD	3CE1	13.5	1.4	37	17.5	25	503
ML16INKD	4LE1	16	1.7	42.5	20	25	635
ML23INKD	4LE1	23	1.7	42.5	20	25	725
ML27.5INKD	4LE1T	27.5	2.1	44	23	30	789
ML30INKD	4JG1T(T2M)	30	2.3	47	24	30	1089
ML30INKD	4JJ1T	30	2.4	67	30	36	1295
ML40INKD	4JG1T(T2M)	40	2.4	49	24	30	1110
ML40INKD	4JJ1T	40	2.4	67	30	36	1330
ML50INKD	4JJ1X	50	3.7	68	30	36	1545
ML60INKD	4JJ1X	60	3.7	68	30	36	1575
ML75INKD	4HK1	75	6.3	70	31	42	1990
ML99INKD	4HK1	99	6.3	80	31	42	2175

ENGINE DESIGN FEATURES

- 4 cycle diesel engine in-line configuration
- Water cooled
- Cast iron heads
- Cold weather starting aid
- Replaceable Cromard liners (30 kW & UP)
- Cast iron crankcase
- 3% mechanical governor
- Force-feed lubrication system
- 2 Year/2000 hour engine warranty

VOLTAGES AVAILABLE

- 120/240VAC 1 PH (STANDARD 8.2 – 23)
- 120/208VAC 3 PH (STANDARD 30 kW UP)
- * OTHERS ON REQUEST

GENERATOR DESIGN FEATURES

- Single bearing configuration
- Steel frame with cast iron ends
- Re-connectable stator with class F insulation
- Laminated steel rotor with class H insulation & Integral cooling fan
- Voltage regulation + / -1.5 Pct no load to full load
- Radio suppression to commercial standards
- 1 year generator warranty



We are the power source!

1212 St. Charles Street Houma, LA 70360
 985-857-8000 800-960-0068
WWW.MLENGINE.COM
 E-mail sales@mlengine.com